



RF1395POS


POS



The RF1395POS is an essential POS hardware solution for the retail and hospitality industries. A 15" AIO full-functional POS solution that offers. True-Flat resistive touch technology, rich I/O ports, low power consumption, easy connectivity to all types of POS peripherals, optimal system performance capability and highly customizable features.

FEATURE

- 15" True-Flat Resistive Touch
- Intel Bay Trail or Skylake U Processor
- Fanless and Silent
- Easy Swap HDD
- 3-Track MSR Available
- iButton Available
- 2nd Display and Customer Display Available

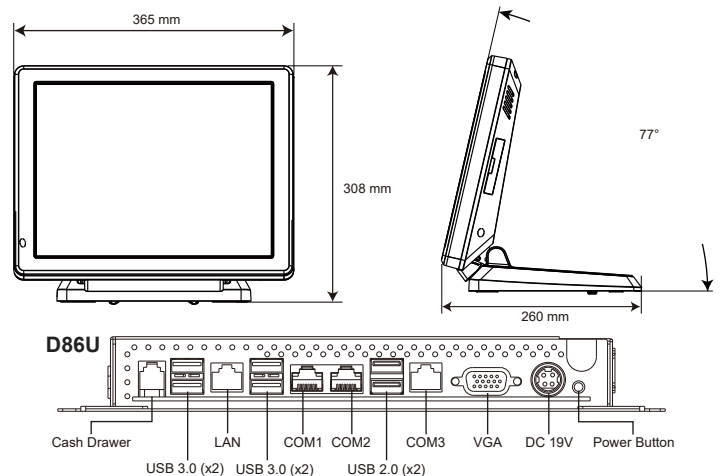



RF1395POS POS

Motherboard	Type	D36
	Processor	Intel Bay Trail CPU Celeron J1900 2.4GHz
	Chipset	CPU Integrated
	System Memory	1x DDR3L SO-DIMM up to 8G, 1333MHz
LCD Touch Panel	Graphic Engine	Intel HD graphic DX11 and OCL1.1
	LCD Size	15" LED LCD
	Brightness	300 nits
	Resolution	1024 x 768
Storage Device	Touch Screen	True-Flat Resistive Touch
	Tilt Adjustment	10° ~ 77°
	Hard Drive	1x 2.5" Slim SATA HDD
	Flash Memory	SATA SSD Flash Card (Option)
Expansion	Mini PCI-E Socket	1
External I/O Ports	USB	1x USB3.0/2.0, 4x USB2.0
	Serial Port	3x RJ45 (powered RS232) (COM1/2 default 5V, COM3 default 12V)
	LAN	1x RJ45
	Cash Drawer	1x RJ11
Power	VGA	1x DB15
	DC Jack	1x 4 pin w/ lock
	Power Switch	1
	Power Adapter	65W / 19V
Peripheral (Option)	MSR	3-Track MSR (USB)
	iButton	iButton (USB)
	2nd Display	15" without touch
	Customer Display	LCM display 2 x 20 characters (USB)
Certificate	EMC & Safety	FCC Class A, CE Mark, LVD
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing
Dimension (WxDxH)		370 x 220 x 298 mm (14.6" x 8.7" x 11.7")
Weight		7.5 kg (16.5 lbs)
OS Supported		Windows 7, POSReady 7, Windows Embedded 8.1 Industry, Windows 10 IoT Enterprise, Linux